

WARNING:

- The external flexible cord of this luminaire cannot be replaced. If the flexible cord is damage, the lamp should be scrapped.
- Do not touch the luminaire in operative status.
- The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire shall be replaced.
- Range mounting height 5m max.
- Only installed outside the arm's reach.
- Suitable for indoors and outdoors.
- Caution, risk of electric shock.
- Please note that the fixture is equipped with standard surge protection only. To protect the fixture from sags, surges, and lightning strikes, additional surge protectors must be deployed on the primary side.



تحذير

- لا يمكن استبدال السلك المرن الخارجي لهذا الضوء. في حالة تلف السلك المرن ، يجب تغيير المصباح بالكامل
- لا تلمس الكشاف في وضع التشغيل
- مصدر الضوء لمصباح الإضاءة هذا غير قابل للاستبدال عندما تصل سطوع الضوء إلى نهاية العمر ، يجب استبدال المصباح بالكامل
- مستوى ارتفاع التثبيت 5 متر بحد أقصى
- يجب فقط بعدد عن مستوى وصول الذراع
- يجب استخدام الدخان و الخارجي
- ملاحظة: وحدة الإضاءة هذه مزودة بحماية من نبضات التوافقية المرغمة حسب المواصفات المعتمدة عالمياً



LEDVANCE Sdn. Bhd. (1166537-U)
100.7.009, 129 Offices, Block J, Jaya One
No. 72A, Jalan Universiti,
46200 Petaling Jaya,
Selangor Darul Ehsan, Malaysia

LEDVANCE Pte. Ltd.
320 Serangoon Road #14-02,
Centrium Square 218108, Singapore.
Phone +65 6911 8260

LEDVANCE Pvt. Ltd.
1201-1202, 12th Floor, Signature Towers,
Tower - A, South City - I, Gurugram - 122001,
Haryana (India)
Consumer care (Name and address as
per above),
Consumer care Tel. No. 0124-4150100
E-mail: ic: customercare@ledvance.com
www.ledvance.in

(주)레드밴스
서울시 강남구 삼성로 554 에스티빌딩 6층
(우편번호 06165)
전화번호: +82 80 489 1700
www.ledvance.co.kr

LEDVANCE Prosperity Co., Ltd.
20/F, Cornell Centre, 50 Wing Tai Rd.,
Chai Wan, Hong Kong

LEDVANCE Middle East FZE
Jebel Ali Free Zone
JAFZA 16, Office 603
P.O. Box 17476, Dubai - UAE

LEDVANCE Pty Ltd
ABN 34 050 103 181
Suite 2.1A
394 Lane Cove Road
Macquarie Park NSW 2113,
Australia
Ph +61 29481 8399 / 1300 467 726
www.ledvance.com.au


Standard:
IEC 60598-1, IEC 60598-2-5
CISPR 15, IEC 61000-3-2




C10449057
G11132933
2021-12-13

www.ledvance.com

LED VALUE FLOOD LIGHT G3

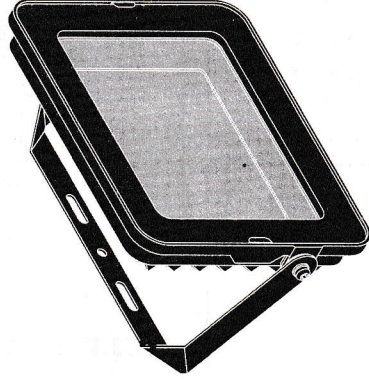

Description	W	L x W x H (mm)	IP	Ta (°C)	Projected Area	Input Current	V _{ac}	Hz	Weight
V-FL-10W-G3 V-FL-10W-G3-830 V-FL-10W-G3-840 V-FL-10W-G3-865	10	97 x 65 x 27	65	-30...+50	0.005m ²	0.049A	220-240V	50/60 Hz	0.18 kg
V-FL-20W-G3 V-FL-20W-G3-830 V-FL-20W-G3-840 V-FL-20W-G3-865	20	109 x 78 x 29	65	-30...+50	0.007m ²	0.095A	220-240V	50/60 Hz	0.23 kg
V-FL-30W-G3 V-FL-30W-G3-830 V-FL-30W-G3-840 V-FL-30W-G3-865	30	134 x 98 x 31	65	-30...+50	0.011m ²	0.150A	220-240V	50/60 Hz	0.33 kg
V-FL-50W-G3 V-FL-50W-G3-830 V-FL-50W-G3-840 V-FL-50W-G3-865	50	170 x 122 x 36	65	-30...+50	0.018m ²	0.242A	220-240V	50/60 Hz	0.51 kg
V-FL-100W-G3 V-FL-100W-G3-830 V-FL-100W-G3-840 V-FL-100W-G3-865	100	255 x 190 x 40	65	-30...+50	0.043m ²	0.477A	220-240V	50/60 Hz	1.27 kg
V-FL-150W-G3 V-FL-150W-G3-830 V-FL-150W-G3-840 V-FL-150W-G3-865	150	305 x 225 x 48	65	-30...+50	0.061m ²	0.722A	220-240V	50/60 Hz	1.86 kg
V-FL-200W-G3 V-FL-200W-G3-830 V-FL-200W-G3-840 V-FL-200W-G3-865	200	340 x 250 x 55	65	-30...+50	0.077m ²	0.962A	220-240V	50/60 Hz	2.47 kg



LEDVANCE

TIS. 1955-2551

IP65 IK06